
LOLA White Pendant LED Linear Light 100cm

Product codes:

Reference: 17013-1-BL

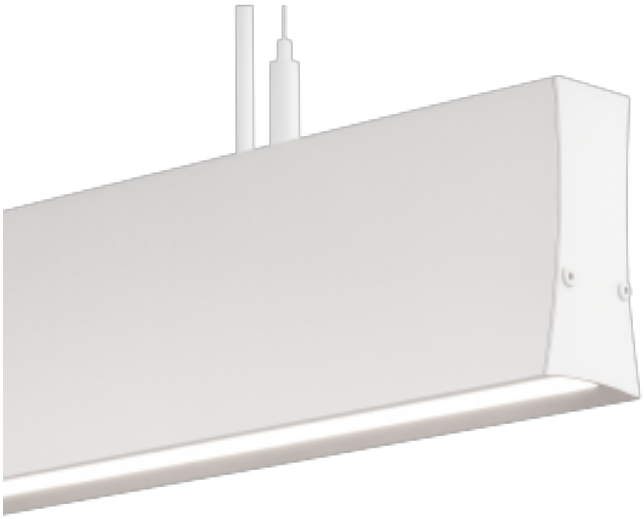

Product features:

Power (W): 40
Power source (V): 85-265V
Color temperature CCT: 2700K
Color temperature CCT: 4000K
Color temperature CCT: 6000K
LED: SMD3040
Luminous efficacy (Lm/W): 110
Brightness (Lm): 4400
Colour: White
IP: IP20
Luminous angle: 60º
Frequency (Hz): 50-60Hz
Power factor ?: 0.97
Measures (mm): 1000x88x40mm
Material: Aluminum + PC
Operating temperature: -20ºC ~ +55ºC
Energy efficiency 2021: A+
Energy efficiency 2023: C
Lifespan: 50.000h
Certification: CE - RoHS
Warranty: 5 años

Product attributes:

Color temperature CCT (ºK): Warm white 2700K, Natural white 4000K, Cool white 6000K
Dimming system: No dimming (On/Off), TRIAC, DALI

Product description:

White design linear luminaire, microprismatic UGR19 LOLA Linear LED Pendant white 100 cm 40W 4400 lm UGR19 SMD3040 Made in Spain

The , , is a professional luminaire made in Spain, with a lacquered aluminium profile and a microprismatic diffuser . SMD3040 LEDs at , for only 40W, intensive use up to 24h.

? 40W? 4400 lm? UGR 19? 100 cm

40W
Power4400 lm
Luminous flux110 lm/W
Efficiency100 cm
Length

The **LOLA DESIGN LED linear luminaire** in white is a professional lighting solution made in **Spain**, designed to offer efficient, high-quality lighting in demanding environments. With a white lacquered aluminium profile and a modern design, it is ideal for spaces requiring elegant, functional lighting.

Fitted with **SMD3040 LEDs**, it offers exceptional performance of **110 lm/W**, emitting a luminous flux of **4400 lumens** for a reduced consumption of only 40W. Perfect for intensive use up to 24h, it has a **microprismatic diffuser** reducing the glare index to UGR 19, for optimal visual comfort. Length 100 cm.

Why choose this product? **? UGR 19 microprismatic**

Anti-glare diffuser, optimal visual comfort. **? SMD3040, 110 lm/W**

4400 lm for 40W, high efficiency, 24h use. **?? Made in Spain**

White lacquered aluminium profile, professional design. Technical specifications Product typeLOLA linear LED pendantColourwhiteLength100 cmPower40WLuminous flux4400 lmEfficiency110 lm/WLEDSMD3040DiffuserMicroprismatic (UGR 19)ProfileLacquered aluminiumOriginMade in SpainUseProfessional indoor (up to 24h) Advantages

- **UGR 19:** microprismatic diffuser.
- **SMD3040, 110 lm/W:** high efficiency.
- **40W, 4400 lm:** reduced consumption.
- **Made in Spain:** professional quality.
- **White lacquered aluminium:** modern design.
- **24h use:** demanding environments.

Recommended applications ?**Offices and open spaces** — UGR19 visual comfort.?**Shops and showrooms** — linear lighting.?**Restaurants and halls** — suspended design.?**Professional spaces** — intensive use. Installation guide 1**Switch off the power**
Cut the supply before installation.2**Adjust the suspension**
Set the height of the suspension cables.3**Fix to the ceiling**
Fix the brackets and the luminaire to the ceiling.4**Wire and check**

Wire to 230V and check the lighting. Frequently asked questions **Does it reduce glare?**

Yes, its microprismatic diffuser offers UGR 19. **What is its efficiency?**

110 lm/W, i.e. 4400 lumens for 40W. **Where is it made?**
In Spain, for intensive professional use (up to 24h). ?

40W
4400 lm?

UGR19
110 lm/W?


100 cm
white?

In stock
Fast shipping

Product gallery:




URG<19
VISION COMFORT


32,3
27,3
23,5
15,8
12
6,9
28
87,55
23,5
1,5
25,6
29,2
30,2
39,9


RAL 9003