
32W PREMIUM LED downlight panel Ø225mm 3000Lm

Product codes:

Reference: PL-DLRG32W

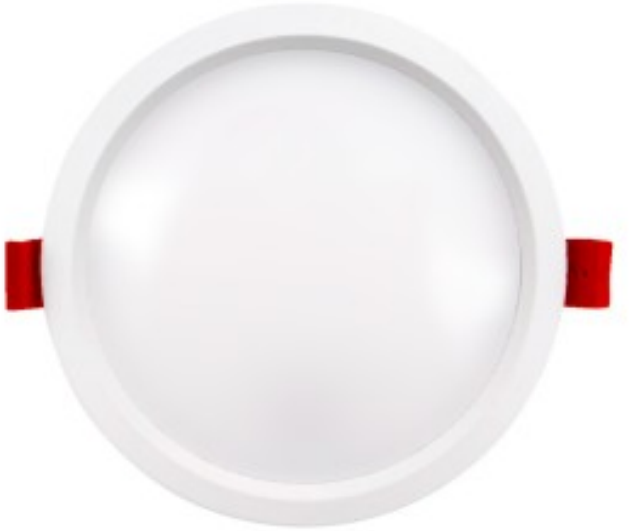

Product features:

Power (W): 32
Power source (V): 100-240V
Color temperature CCT: 2700K
Brightness (Lm): 3000
Color rendering index (Ra):: ?80
Colour: White
Luminous angle: 120º
Frequency (Hz): 50-60Hz
Forma: Redondo
Measures (mm): Ø225x30mm
Medida de corte (mm.): Ø205mm
Material: Steel + PC
Operating temperature: -20ºC ~ +55ºC
Energy efficiency 2021: A+
Certification: CE - RoHS
Warranty: 3 años

Product attributes:

Color temperature CCT (ºK): Warm white 2700K

Product description:

32W Ø225 mm PREMIUM downlight, ultra-thin, 3000 lm PREMIUM Recessed LED Downlight 32W Ø225 mm 3000 lm Ultra-Thin Opal PMMA 120º IP20

The (Ø225 mm) with an design (visible thickness 5 mm) offers . SMD2835 LED, aluminium reflector, opal PMMA diffuser, 120º angle, IP20 rating, cuts consumption by up to 80% (Ø205 mm cut-out).

? 32W? 3000 lm? 5 mm? IP20

32W
Power3000 lm
Luminous fluxØ225 mm
Diameter120º
Angle

The **32W PREMIUM recessed LED downlight** (Ø225 mm) stands out for its **ultra-thin** design, with a visible thickness of less than 5 mm. With 32W of consumption, it advantageously replaces low-consumption recessed lamps, halogen bulkheads and CFLs, cutting consumption by up to **80%**.

Built with very bright **SMD2835** LEDs, an aluminium reflector housing and an **opal PMMA** diffuser, it provides even, comfortable lighting of **3000 lumens**, with a 120º angle. Ø205 mm cut-out, IP20 rating, ideal for living rooms, corridors, kitchens, offices and shops. Elegant, discreet finish.

Why choose this product? **? Ultra-thin 5 mm**

Reduced visible thickness, discreet finish. **? SMD2835, 3000 lm, 120º**

Opal PMMA diffuser, even lighting. **? -80% consumption**
Replaces halogen and CFL, aluminium reflector. Technical specifications Product typePREMIUM recessed LED downlightPower32WLuminous flux3000 lmDiameterØ225 mmCut-outØ205 mmVisible thickness 5 mmLEDSMD2835DiffuserOpal PMMAAngle120ºProtectionIP20 Advantages

- **Ultra-thin 5 mm:** discreet.
- **32W, 3000 lm:** SMD2835.
- **Opal PMMA:** even.
- **120º:** shadow-free.
- **Ø205 mm cut-out:** recessed.
- **-80% consumption:** replaces halogen.

Recommended applications ?**Living rooms and corridors** — discreet lighting.?**Kitchens and offices** — ultra-thin.?**Shops** — opal PMMA.?**Renovation** — replaces halogen and CFL. Installation guide 1**Switch off the power**
Cut the supply before installation.2**Make the cut-out**
Prepare a Ø205 mm cut-out in the ceiling.3**Recess and wire**
Insert the downlight and wire the driver.4**Check**

Restore power and check the lighting. Frequently asked questions **What is its visible thickness?**

Less than 5 mm, ultra-thin design. **What cut-out does it need?**

A Ø205 mm cut-out (Ø225 mm outer). **What is its lighting angle?**
120º, opal PMMA diffuser, even lighting. ?

32W
3000 lm?

5 mm
Ø225 mm?

PMMA
120º?

In stock
Fast shipping

Product gallery:





