Adjustable Surface Motion Detector 180°/360° IP20

Product codes:

Reference: 3783

Product features:

Power (W): 300
Power source (V): 220-240V
Luminous angle: 180°/360°
Frequency (Hz): 50-60Hz
Measures (mm): 44*39.5*22.5 mm
Material: Thermoplastic
Operating temperature: -20ºC ~ +55ºC
Lifespan: 30.000h
Certification: CE - RoHS
Warranty: 2 años



Product attributes:

Product description:

Adjustable presence detector 180º/360º Adjustable Surface Motion Sensor IP20

An with coverage up to 360º and a 6-metre range. Time, sensitivity and shut-off settings, a built-in dusk sensor and a 2-year warranty.

? 180º/360º? 6 m? IP20? 2 years

360º
Coverage6 m
DetectionIP20
Protection2 years

Warranty

The **adjustable surface motion sensor** lets you adjust the on-time, the shut-off range and the light sensitivity. With a coverage angle of up to **360º** and a **6-metre** detection range, it adapts precisely to each space thanks to its adjustable head.

It operates at an input and output voltage of **220-240V** and uses infrared as its activation source, with a built-in **dusk sensor**: it activates when a heat source moves within its field and deactivates when movement stops. Its timer covers a range of **5 seconds to 7 minutes**. It includes the screws needed for assembly and comes with a 2-year warranty.

Why choose this product? **? Adjustable up to 360º**

Adjust the detection area with the adjustable head. **? Adjustable 5 s - 7 min**

Adjustable time, shut-off range and light sensitivity. **? 2-year warranty**

Assured reliability, mounting screws included. Technical specifications Product typeAdjustable surface motion sensorCoverage angle180º / 360ºDetection range6 mTimer5 s to 7 minSettingsTime, shut-off range, light sensitivityDusk sensorYesVoltage220-240VProtectionIP20 (indoor)Warranty2 years Advantages

- **180º/360º adjustable:** adjustable detection area.
- **6 m detection:** reliable coverage.
- **Adjustable 5 s - 7 min:** time and sensitivity.
- **Dusk sensor:** switching based on ambient light.
- **Screws included:** easy mounting.
- **2-year warranty:** assured reliability.

Recommended applications ?**Corridors and stairs** — automatic switching on passage.?**Bathrooms** — convenience and savings.?**Fitting rooms** — lighting on demand.?**Halls and passage areas** — adjustable detection. Installation guide 1**Switch off the power**
Cut the supply before installation.2**Surface-mount**
Fix the sensor using the included screws.3**Aim the head**
Adjust the adjustable head towards the area to cover (180º/360º).4**Set and test**

Adjust the time, shut-off range and sensitivity, then test. Frequently asked questions **What is its detection range?**

Up to 6 metres, with adjustable coverage up to 360º. **Can the on-time be adjusted?**

Yes, from 5 seconds to 7 minutes. **What is the warranty?**
This product comes with a 2-year warranty. ?

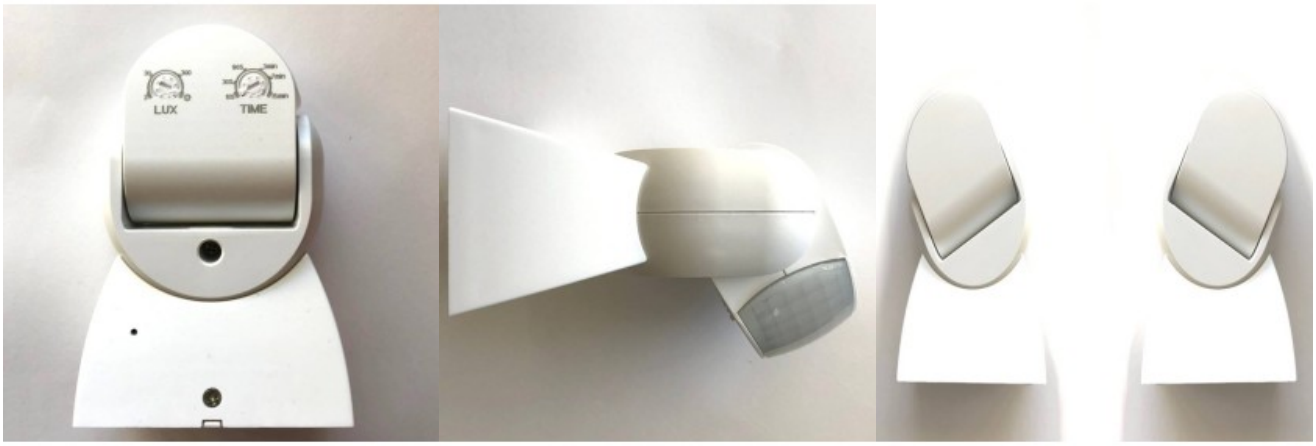
180º/360º
Adjustable?

6 m
Detection?

2 years
Warranty?

In stock
Fast shipping

Product gallery:


LUX
TIME