# 5W CCT DARK BLACK Mini Recessed LED Spot

## Product codes:

Reference: 8051MATTE



## Product features:

Power (W): 5
Power source (V): 220-240V
Color temperature CCT: Seleccionable 3000K-4000K-6000K
LED chip brand: BRIDGELUX
Luminous efficacy (Lm/W): 125
Brightness (Lm): 620
Color rendering index (Ra):: ?95
Colour: Black
IP: IP20
Luminous angle: 24º
Frequency (Hz): 50-60Hz
Measures (mm): Ø40x55mm
Medida de corte (mm.): Ø37mm
Material: Aluminum
Driver: LIFUD Flicker-free
Operating temperature: -20ºC ~ +55ºC
Energy efficiency 2021: A+
Energy efficiency 2023: D
Lifespan: 35.000h
Certification: CE - RoHS
Warranty: 3 años

## Product attributes:

Color temperature CCT (ºK): Selectable CCT (3000K-4000K-6000K)

## Product description:

Recessed spot, selectable CCT, CRI > 95 Mini Recessed LED Spot 5W CCT 24º UGR11 - DARK MATTE BLACK

The with a BridgeLUX COB chip and LIFUD driver offers 620 lumens, a 24º beam, and UGR 11. Selectable CCT temperature (3000K/4000K/6000K), Ø40x55 mm, Ø37 mm cut-out, glossy black chrome finish.

? 5W? 620 lm? CRI > 95? UGR 11

5W

Power 620 lm
Luminous flux 24º
Beam CRI > 95
Colour rendering

The **5W mini recessed LED spot** is the perfect solution for those seeking versatile, high-quality lighting. With a CCT colour-temperature selector built into the cable, you can choose between 3000K, 4000K and 6000K to suit your needs. Its compact Ø40x55 mm dimensions and Ø37 mm ceiling cut-out allow easy, discreet installation.

Made of aluminium with a glossy black chrome finish, this spot offers an elegant, modern design. Fitted with a **BridgeLUX COB 2630 DS-C30** LED chip, it provides 580 lumens with a 24º beam, ideal for focused lighting. Its **CRI > 95** ensures faithful colour rendering and its UGR 11 great visual comfort. The LIFUD driver guarantees high durability and flicker-free lighting.

Why choose this product? **? Selectable CCT**

3000K, 4000K or 6000K via the selector on the cable. **? CRI > 95, UGR 11**

Faithful colour rendering and great visual comfort. **? LIFUD driver**
Flicker-free, high durability. Available light shades

Available in three selectable colour temperatures, to match the atmosphere of each space:

3000 K
Warm white 4000 K
Neutral white 6000 K
Cool white Technical specifications Product type Mini recessed LED spot Power 5W Luminous flux 620 lm LED chip BridgeLUX COB 2630 DS-C30 Colour temperature Selectable CCT (3000K/4000K/6000K) Beam 24º CRI > 95 UGR 11 Dimensions Ø40x55 mm Ceiling cut-out Ø37 mm Material Aluminium Finish matte black Driver Flicker-free LIFUD Advantages

- **Selectable CCT:** 3000K, 4000K or 6000K.
- **CRI > 95:** faithful colour rendering.
- **UGR 11:** low glare.
- **LIFUD driver:** flicker-free.
- **Compact Ø40x55 mm:** discreet Ø37 mm cut-out.
- **24º beam:** focused lighting.

Recommended applications ? **Living rooms and bedrooms** — accent lighting. ? **Shops and hotels** — faithful colour rendering. ? **Corridors and false ceilings** — discreet integration. ? **Showrooms** — product highlighting. Installation guide 1 **Prepare the cut-out**
Make a Ø37 mm cut-out in the ceiling. 2 **Choose the temperature**
Set the CCT selector (3000K, 4000K or 6000K). 3 **Wire it**
Connect the LIFUD driver to the mains. 4 **Recess it**

Insert the spot into the cut-out and check the lighting. Frequently asked questions **How to choose the temperature?**

Via the CCT selector on the cable: 3000K, 4000K or 6000K. **What ceiling cut-out?**

Ø37 mm (spot dimensions Ø40x55 mm). **What is the colour rendering?**
CRI > 95, with UGR 11 for low glare. ?

## 5W
620 lm ?

## CRI > 95
UGR 11 ?

## CCT
3000-6000K ?

## LIFUD
Flicker-free

### Product gallery:








55
40
40

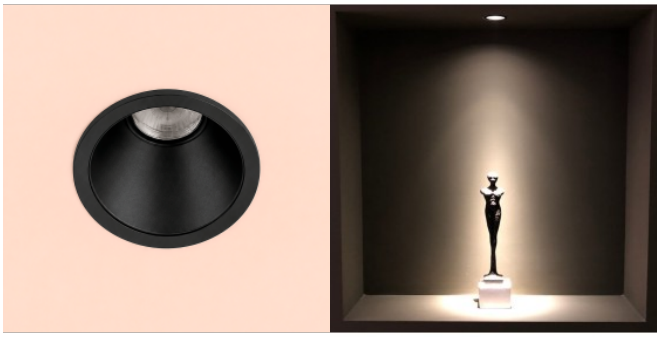


CRI<70
Ra
Chromatic Reproduction Index
Farbwiedergabeindex
Indice de Reproducción Crómatica
Rendu des Couleurs
Indice de rendu des couleurs
Indice di resa cromatica
CRI>95
Ra


bridgelux
CHIP INSIDE
Bridging Light and Life™


WC