Circular Bezel ring Chrome/White for LED GU10/MR16 Bulb Low Glare UGR19

Product codes:

Reference: 8070

Product features:

IP: IP20
Measures (mm): Ø85x35mm
Medida de corte (mm.): Ø72mm
Material: Thermoplastic
Certification: CE - RoHS
Warranty: 5 años



Product attributes:

Colour: Cromo

Product description:

Decorative anti-glare ring for dichroic bulbs Recessed Circular Ring White/Chrome for GU10/MR16 LED UGR19

The holds your dichroic LED bulbs with an elegant design and low glare . High-resistance thermoplastic, Ø72 mm cut-out, Ø85 mm outer.

? GU10/MR16? UGR 19? Ø72 mm? Blanc/Chrome

GU10/MR16

CompatibilityØ72 mm
Cut-outØ85 mm
Outer ØUGR 19
Glare

The **recessed circular ring** for MR16 and GU10 dichroic LED bulbs is designed to provide attractive, refined decoration. Its elegant shape creates exclusive, sophisticated atmospheres in any space, complementing your bulb (not included).

Made of **high-resistance thermoplastic**, it stands out for its robustness and ensures a long lifespan while keeping its appearance. Thanks to its low glare index **UGR 19**, it offers great visual comfort, ideal for spaces needing functional light without eye strain. Ø72 mm ceiling cut-out, Ø85 mm outer dimensions, 35 mm depth.

Why choose this product? **? GU10 and MR16**

Compatible with dichroic LED bulbs (not included). **? UGR 19**

Low glare, great visual comfort. **? White/Chrome**

Modern, minimalist design, tough thermoplastic. Technical specifications Product typeRecessed circular ring for GU10/MR16CompatibilityGU10 and MR16 LED bulbs (not included)Ceiling cut-outØ72 mmOuter dimensionsØ85 mmDepth35 mmMaterialHigh-resistance thermoplasticColourWhite / ChromeUGR 19 Advantages

- **GU10/MR16-compatible:** bulb of your choice (not included).
- **UGR 19:** low glare.
- **White/Chrome:** elegant, minimalist design.
- **Tough thermoplastic:** long lifespan.
- **Ø72 mm cut-out:** standard installation.

Recommended applications ?**Living rooms and bedrooms** — decorative lighting.?**Hotels and restaurants** — refined atmospheres.?**Shops** — product highlighting.?**Corridors and false ceilings** — elegant integration. Installation guide 1**Prepare the cut-out**
Make a Ø72 mm cut-out in the ceiling.2**Insert the bulb**
Fit a GU10 or MR16 bulb (not included) in the ring.3**Recess the ring**
Insert the ring into the cut-out via its springs.4**Check**

Check the fixing and the lighting. Frequently asked questions **Is the bulb included?**

No, it holds a GU10 or MR16 bulb (not included). **What ceiling cut-out?**

Ø72 mm (outer dimensions Ø85 mm). **Does it reduce glare?**
Yes, its UGR 19 index ensures great visual comfort. ?


GU10/MR16
Ø72 mm?

UGR 19
Comfort?

White/Chrome
Thermoplastic?

In stock
Fast shipping

Product gallery:

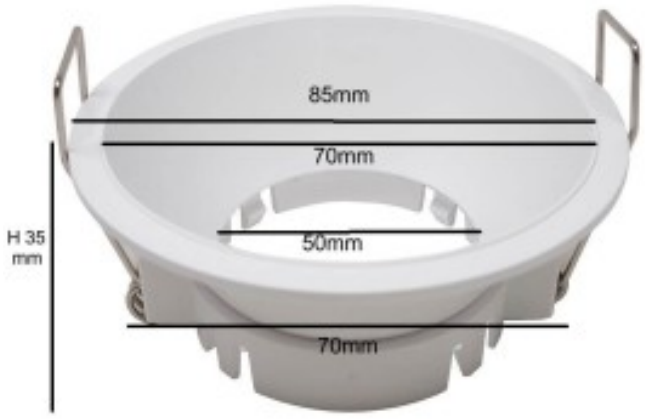

Cut Size: 72mm