LED Ceiling Light PRIME 10W 1000Lm

Product codes:

Reference: DECPRG10W



Product features:

Power (W): 10
Power source (V): 220-240V
Color temperature CCT: 4000K
Luminous efficacy (Lm/W): 100
LED diode efficiency (Lm/W): 110
Brightness (Lm): 1000
Color rendering index (Ra):: ?80
Colour: Grey
IP: IP20
Luminous angle: 100º
Frequency (Hz): 50-60Hz
Power factor ?: 0.5
Measures (mm): Ø70x120mm
Material: Aluminum
Operating temperature: -20ºC ~ +40ºC
Energy efficiency 2021: A+
Lifespan: 30.000h
Certification: CE - RoHS
Warranty: 2 años

Product attributes:

Color temperature CCT (ºK): Natural white 4000K

Product description:

Circular surface ceiling light, white, black or grey PRIME LED Ceiling Light 10W 1000 lm Surface Mount Ø70x120 mm

The with an integrated LED delivers (100º angle). In white, black or grey lacquered aluminium, it surface-mounts where recessing is not possible. Dimensions Ø70x120 mm, for indoors.

? 10W? 1000 lm? 100º? Surface

10W

Power1000 lm
Luminous flux100º
BeamØ70x120 mm
Dimensions

The **PRIME circular ceiling light** for surface mounting integrates a 10W LED and a luminous flux of 1000 lumens, with a 100º angle for homogeneous coverage. Made of aluminium and lacquered in white, black or grey with an excellent finish, it blends elegantly into any interior.

It is perfect for indoor installation, on **ceilings where light points cannot be recessed**. Compact (Ø70x120 mm), it is a discreet, efficient solution for accent or decorative lighting in corridors, bedrooms, shops and passageways.

Why choose this product? **? Surface mounting**
For ceilings without recessing possible. **? 10W, 1000 lm**
Integrated LED, homogeneous 100º angle. **? White, black or grey**
Lacquered aluminium, compact, elegant design. Technical specifications Product typePRIME circular LED ceiling light (surface)Power10WLuminous flux1000 lmBeam angle100ºMaterialLacquered aluminiumColoursWhite, black or greyDimensionsØ70x120 mmMountingSurfaceUseIndoor Advantages

- **Surface mounting:** no recessing.
- **10W, 1000 lm:** homogeneous 100º angle.
- **White, black or grey:** lacquered aluminium.
- **Compact Ø70x120 mm:** discreet design.
- **Integrated LED:** ready to fit.
- **Indoor:** corridors, bedrooms, shops.

Recommended applications ?**Corridors and halls** — accent lighting.?**Bedrooms and living rooms** — decorative lighting.?**Shops** — discreet light points.?**Concrete ceilings** — surface mounting. Installation guide 1**Switch off the power**
Cut the supply before installation.2**Surface-mount it**
Fix the ceiling light to the ceiling with the accessories.3**Wire it**
Wire to the mains per standards.4**Check**
Restore power and check the lighting. Frequently asked questions **How is it mounted?**
On the surface, on ceilings where recessing is impossible. **Which colours are available?**
White, black or grey. **What is the luminous flux?**
1000 lumens at 10W, 100º angle. ?

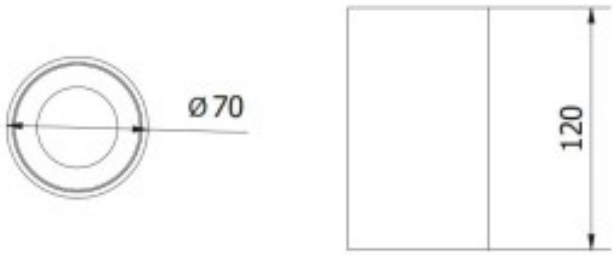
10W
1000 lm?

Surface
100º?

White/Black/Grey
Ø70x120 mm?

In stock
Fast shipping

Product gallery:


Ø 70
120