LED Ceiling Light 40W black chip CCT OSRAM 4000Lm

Product codes:

Reference: PF8126



Product features:

Power source (V): 220-240V
Color temperature CCT: Seleccionable 3000K-4000K-6000K
LED: SMD2835
LED chip brand: OSRAM
Dimmable: Sí, TRIAC
Color rendering index (Ra):: ?80
Colour: Black
IP: IP44
Frequency (Hz): 50-60Hz
Material: Aluminum + PC
Operating temperature: -20ºC ~ +55ºC
Energy efficiency 2021: A+
Energy efficiency 2023: F
Lifespan: 50.000h
Certification: CE - RoHS
Warranty: 5 años

Product attributes:

Product description:

Circular surface ceiling light CCT, ceiling or wall Circular LED Ceiling Light 40W black OSRAM SMD2835 Chip 4000 lm CCT IP44

The in black finish with a OSRAM SMD2835 chip delivers . Elegant design, surface mounting on ceiling or wall, IP44. CCT selector (3000K / 4000K / 6000K). TRIAC-dimmable.

? 40W? 4000 lm? CCT? IP44

40W

Power4000 lm
Luminous fluxCCT
TemperaturesIP44
Protection

The **40W circular surface LED ceiling light**, in black finish, is an elegant, efficient lamp, perfect for lighting any room. With a luminous flux of 4000 lumens thanks to its **OSRAM SMD2835** LED chip known for efficiency and durability, it adds a modern touch to any interior.

It mounts easily **on the surface**, on the ceiling or wall, and includes all the accessories needed for installation. Its CCT selector lets you choose between warm white, neutral white and cool white, to suit any atmosphere. It is TRIAC-dimmable, from soft light to full intensity. Its IP44 protection suits kitchens, bathrooms and damp environments. Dimensions Ø600x50 mm.

Why choose this product? **? Selectable CCT**

3000K, 4000K or 6000K to suit the atmosphere. **? OSRAM SMD2835 chip**

4000 lm at 40W, high efficiency. **? TRIAC-dimmable**
Light dimming as needed. Available light shades

Available in three selectable colour temperatures, to match the atmosphere of each space:

3000 K
Warm white4000 K
Neutral white6000 K
Cool white Technical specifications Product typeCircular surface LED ceiling lightPower40WLuminous flux4000 lmLED chipOSRAM SMD2835ColourblackColour temperatureCCT 3000K / 4000K / 6000KDimmingTRIACDimensionsØ600x50 mmProtectionIP44MountingSurface (ceiling or wall) Advantages

- **Selectable CCT:** 3000/4000/6000K.
- **OSRAM SMD2835 chip:** 4000 lm at 40W.
- **Surface mounting:** ceiling or wall.
- **TRIAC-dimmable:** light dimming.
- **IP44:** damp areas.
- **Aluminium:** sturdy and durable.

Recommended applications ?**Living rooms and bedrooms** — general lighting.?**Corridors and halls** — surface mounting.?**Kitchens and bathrooms** — damp areas.?**Kitchens and dining rooms** — pleasant light. Installation guide 1**Switch off the power**
Cut the supply before installation.2**Choose the temperature**
Set the CCT selector (3000/4000/6000K).3**Surface-mount it**
Fix the ceiling light with the included accessories.4**Wire and check**

Wire to the mains and check the lighting. Frequently asked questions **Can the temperature be chosen?**

Yes, between 3000K, 4000K and 6000K via the CCT selector. **What is the luminous flux?**

4000 lumens at 40W (OSRAM SMD2835 chip). **Is it suitable for damp areas?**
Yes, its IP44 rating suits kitchens and bathrooms. ?

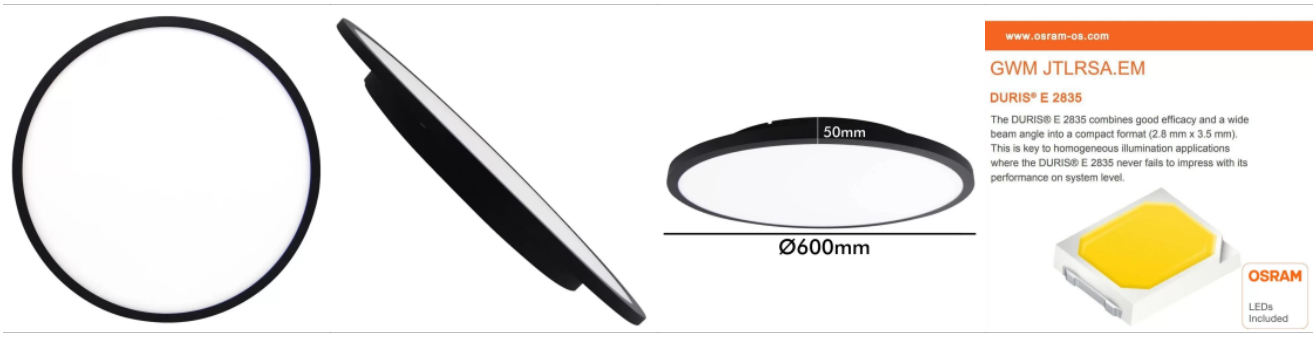
40W
4000 lm?

CCT
OSRAM SMD2835?

Surface
IP44?

In stock
Fast shipping

Product gallery:


50mm
Ø600mm
www.osram-os.com
GWM JTLRSA.EM
DURIS® E 2835
The DURIS® E 2835 combines good efficacy and a wide beam angle into a compact format (2.8 mm x 3.5 mm). This is key to homogeneous illumination applications where the DURIS® E 2835 never fails to impress with its performance on system level.
OSRAM
LEDs Included


COLOR SELECTION
3000
4000
6000
New Style
CCT LED LIGHTING